




**Coseng TC633
Rim Clamp Tire Changer**

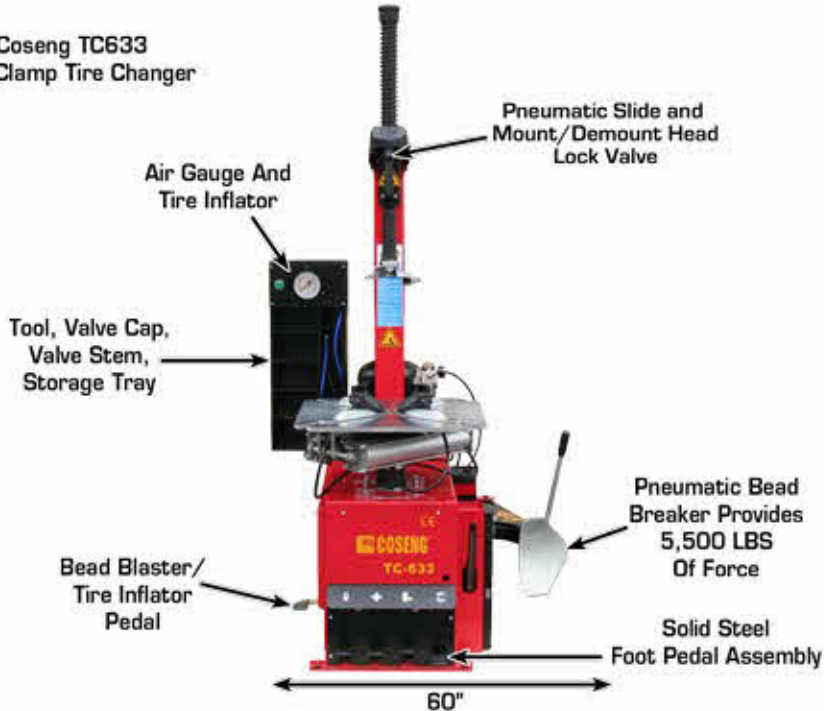

Pneumatic Slide and
Mount/Demount Head
Lock Valve

Air Gauge And
Tire Inflator

Tool, Valve Cap,
Valve Stem,
Storage Tray


86"


Pneumatic Bead
Breaker Provides
5,500 LBS
Of Force

60"


70"

(With Column Tilted Back)

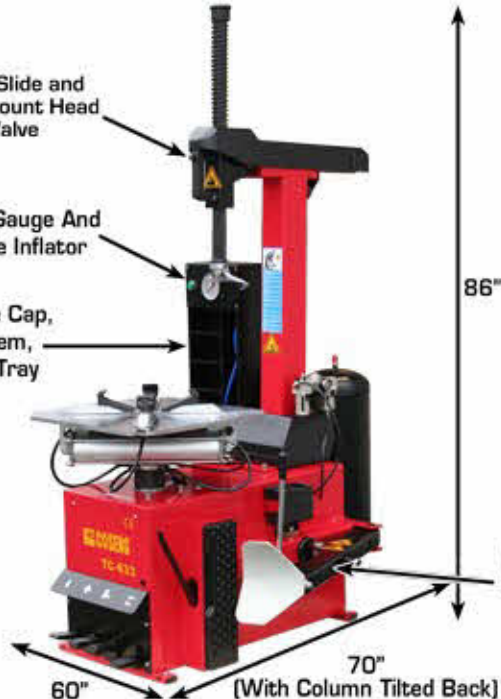


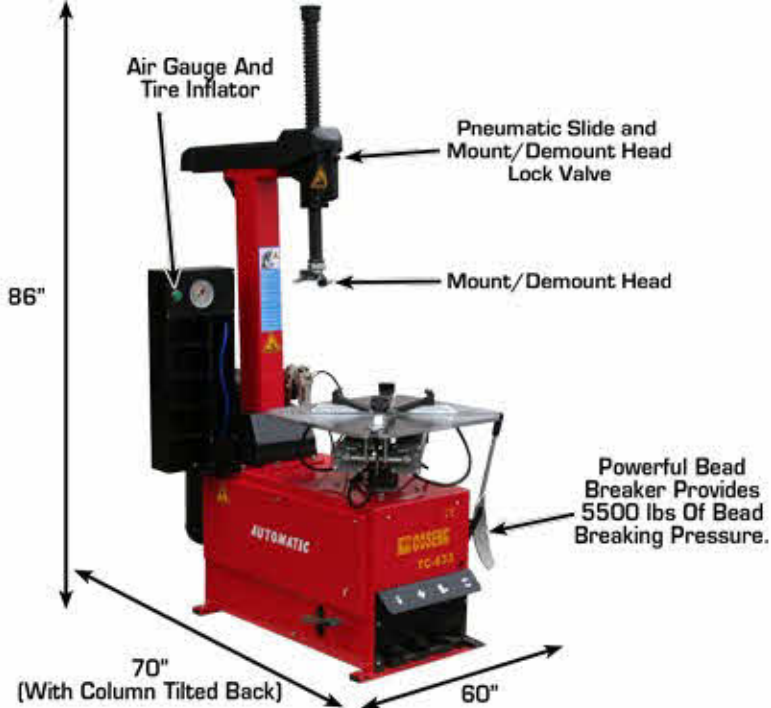



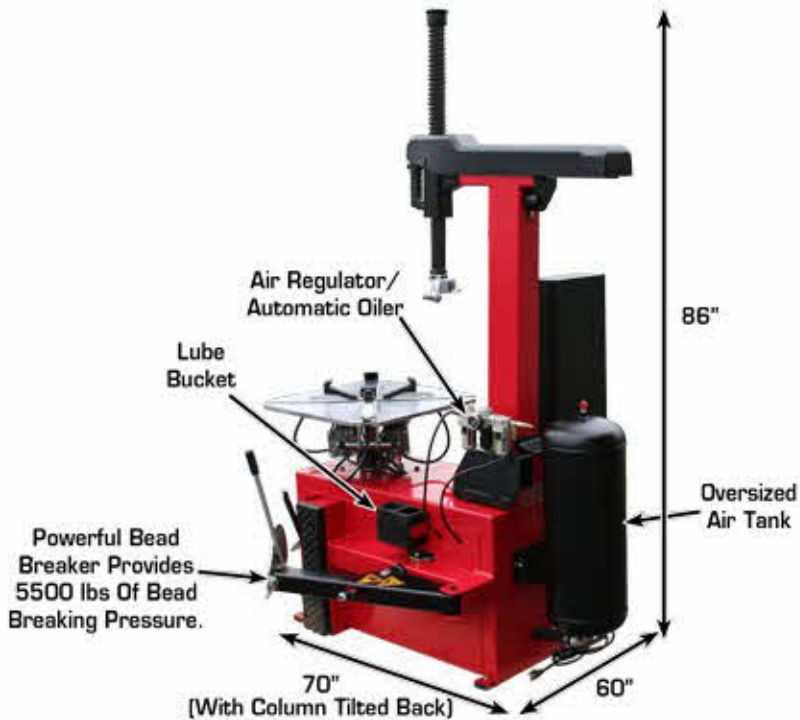

**Coseng TC633
Rim Clamp Tire Changer**

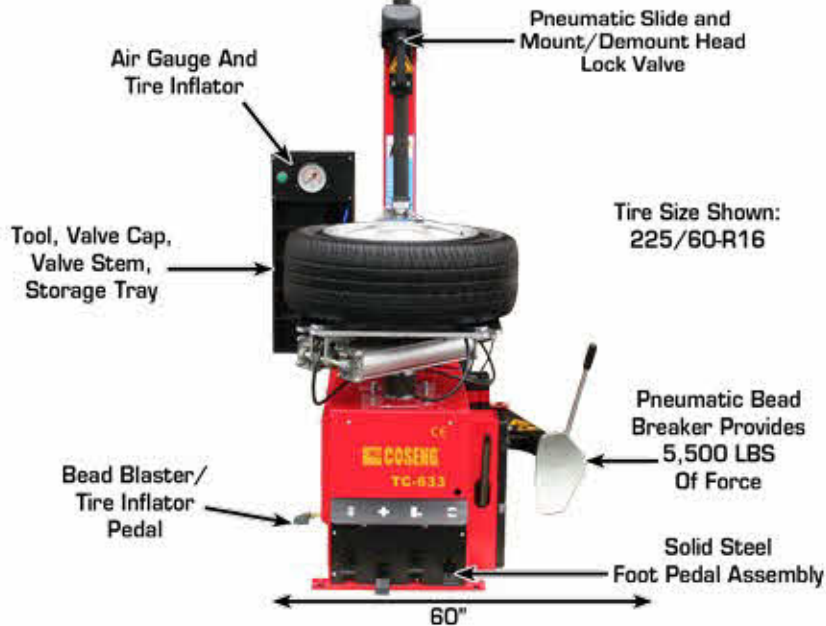

Pneumatic Slide and
Mount/Demount Head
Lock Valve

Air Gauge And
Tire Inflator

Tire Size Shown:
225/60-R16



86"

Pneumatic Bead
Breaker Provides
5,500 LBS
Of Force

60"

70"

[With Column Tilted Back]





Air Gauge And
Tire Inflator

Pneumatic Slide and
Mount/Demount Head
Lock Valve

Push Button Allows You
To Lock The Mounting Bar
Into Place

Mount/Demount Head

Tool, Valve Cap,
Valve Stem,
Storage Tray

Oversized
Cylinders
Ensure
Maximum
Clamping
Pressure.

Regulator/
Automatic
Oiler

Foot Pedal
Controls

Tire Tool
Included

Powerful Bead
Breaker Provides
5500 lbs Of Bead
Breaking Pressure.



Labels Show Each Pedals' Operation

TC-633

Bead Blaster/
Air Inflator
Pedal


Removable Panel
Allows Easy Access
To Foot Pedal
Assembly

Tilt
Column
Pedal

Clamping Jaw
Pedal
Moves Jaws
In And Out

Bead
Breaker
Pedal

Turn Table
Rotation Pedal
Forward
And Reverse

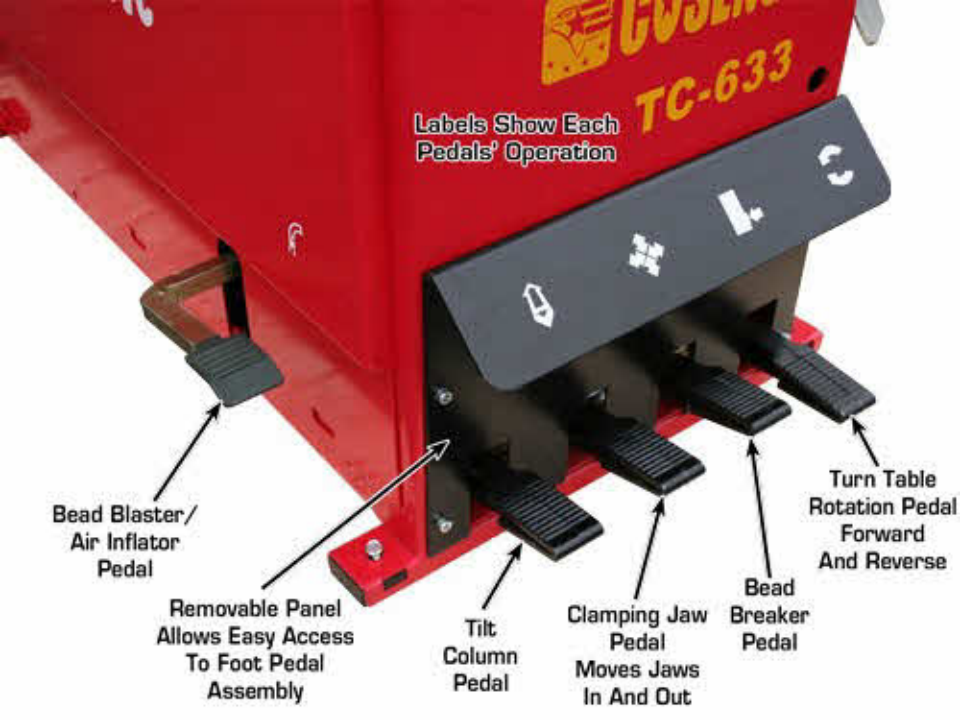

Maximum Spread
Of Jaws

Bead Blaster
Air Holes
Located In
Jaw Slides

27"



Minimum Spread
Of Jaws

Bead Blaster
Air Holes
Located In
Jaw Slides


11°




Maximum Spread Of Jaws With Optional
Deluxe ATV Adapters
In Outer Position



Minimum Spread Of Jaws With
Optional Deluxe ATV Adapters
In Inner Position

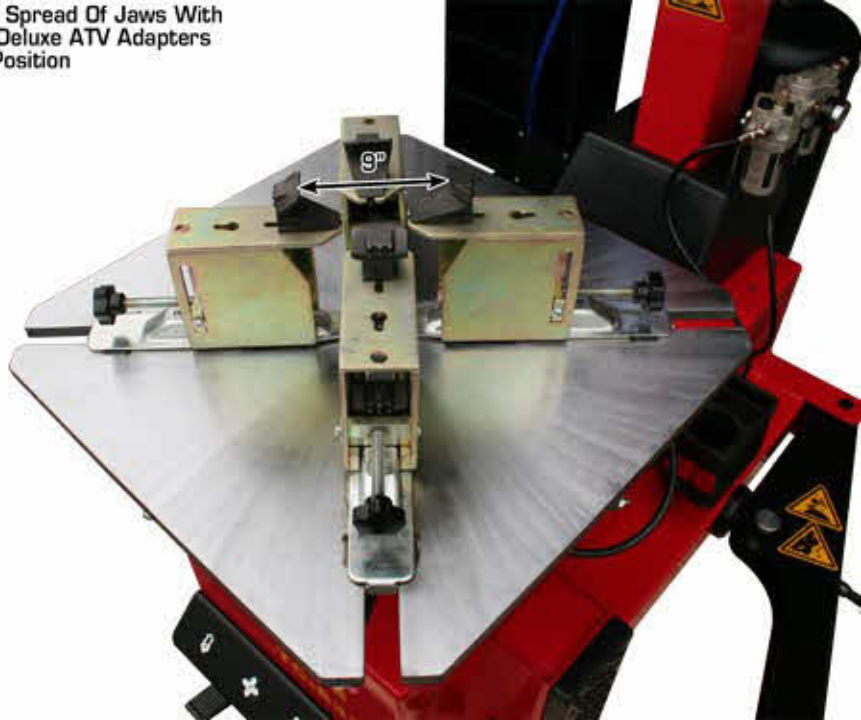

Maximum Spread Of Jaws With Optional
Deluxe Motorcycle Adapters
In Outer Position

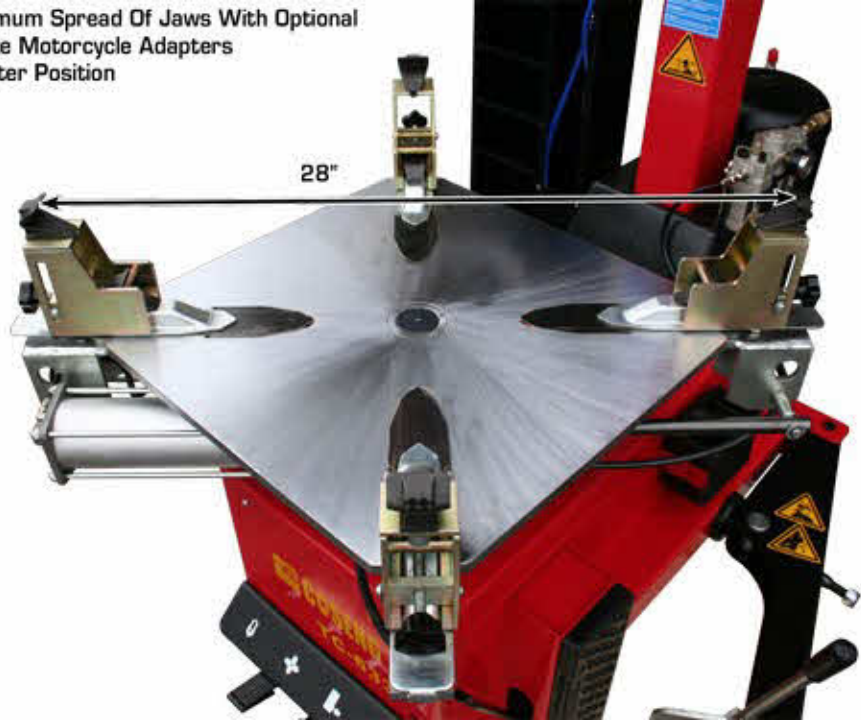



**Tire Size Shown:
225/60-R16**

**Powerful Bead
Breaker Provides
5500 lbs Of Bead
Breaking Pressure.**

Tire Size Shown:
225/60-R16

Mount/Demount Head



This Head **DOES NOT**
Touch The Rim When
The Wheel Is Rotated.

